



787 DRUM GAUGE

Provides a visual gauge indicating the chemical content of the drum and is supplied with a 2" ell for refilling the drum. The gauge is secured to the malleable iron elbow with a stainless steel clamp.

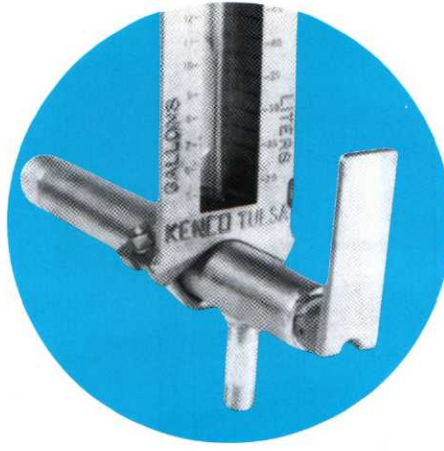

810 DRUM GAUGE

Is supplied with a vented 2" malleable iron elbow for refilling the drum and a test valve for checking the pumping rate.

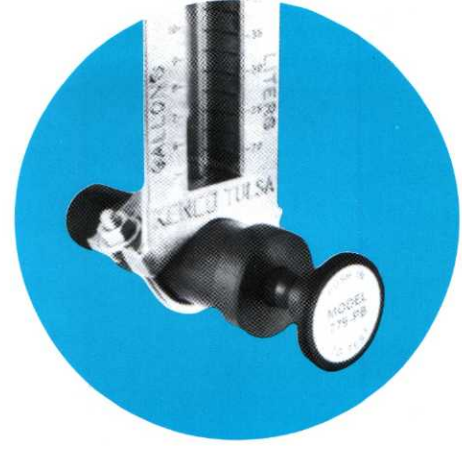

779-PB DRUM GAUGE

Has a heavy-duty Schedule 120PVC head with a push-pull test valve. The Drum Gauge frame is our standard cast aluminum. There is a brace to support the weight of the gauge that is connected to the top of the drum rim and it also stabilizes the gauge from lateral movement. It has a 1/4" female NPT outlet.

REPAIR KITS

GAUGE GLASS REPAIR KITS

GAUGES WITHOUT VENT CONNECTIONS 593K
 GAUGES WITH VENT CONNECTIONS 593KV

VALVE REPAIR KITS 943K

VALVE ASSEMBLIES


Complete with "U" BOLTS

	779-PB					
MODEL NO.	596	599	779	779-KS	787	810
VALVE ASSEMBLY PART NO.	P 598	P 6434	P 1208	P 1048	P 598-8	P 1210
	P 6977					

For 304 STAINLESS STEEL VALVE ASSEMBLIES add the suffix S to the part number and add PVC to the part number for PVC VALVE ASSEMBLIES. EXAMPLE 598-PVC

OPTIONAL VENT CONNECTION

The DRUM GAUGES are vented to atmosphere. These gauges can be supplied with a 1/4" NPT connection to vent the gauge back into the tank. To specify gauges with this connection, add "V" to the product number, i.e. 779-V

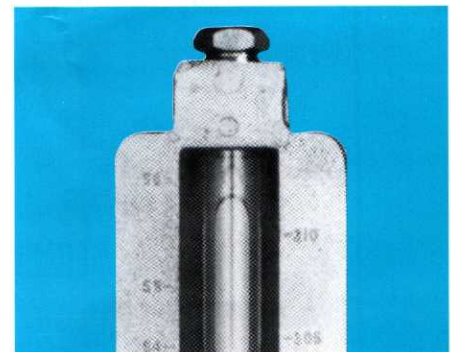

PRODUCT SELECTION GUIDE

WETTED MATERIALS	GAUGE with MALLEABLE IRON FILLER NECK	GAUGE with MALLEABLE IRON FILLER NECK and TEST VALVE
CARBON STEEL, GLASS, AFLAS 150	787	810
304 STAINLESS STEEL, GLASS, AFLAS 150	787-S	810-S
PVC, GLASS, AFLAS 150	NA	810-P

OTHER O-RING COMPOUNDS AVAILABLE ON REQUEST